


IDT 5P49V5908 EVM BOARD
REV : 1

- PAGE 01 : TITLE_PAGE
PAGE 02 : 5P49V5908 CONNECTION
PAGE 03 : VC5
PAGE 04 : POWER CONNECTION
PAGE 05 : I2CMODULE






Title		
IDT_5P49V5908 EVM_BOARD_REV1		
Size	Document Number	Rev
B	305-PD-15-0209	1
Date:	Friday, May 22, 2015	Sheet 1 of 5

5P49V5908 CONNECTIONS




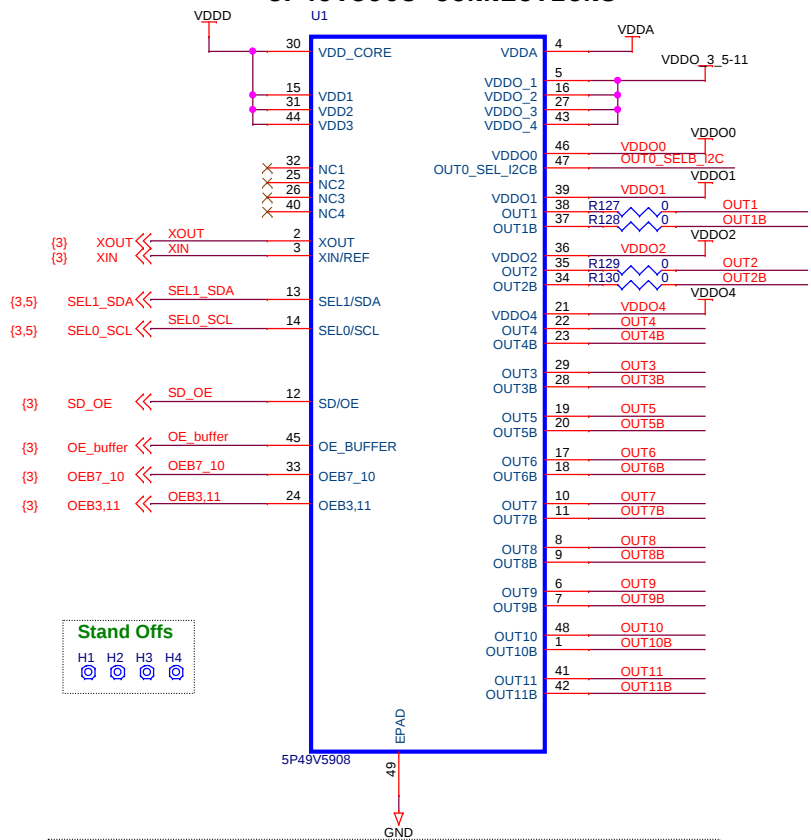


Place 33 OHM Resistors Closed to Main Device For LP HCSSL TERMINATION
Place AC Coupling Capacitors Close to SMA


Place R87 & R88 33 OHM Resistors Closed to Main Device For HCSSL TERMINATION
R89 & R90 Should Closer to the SMA

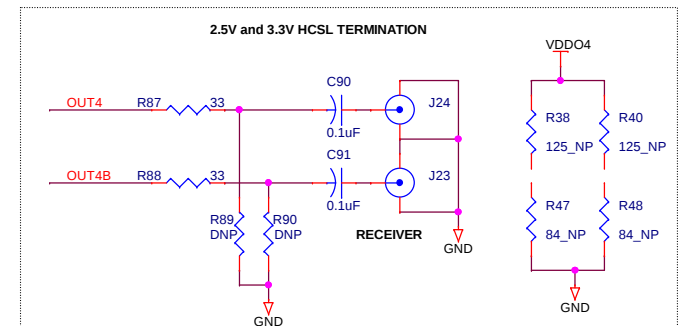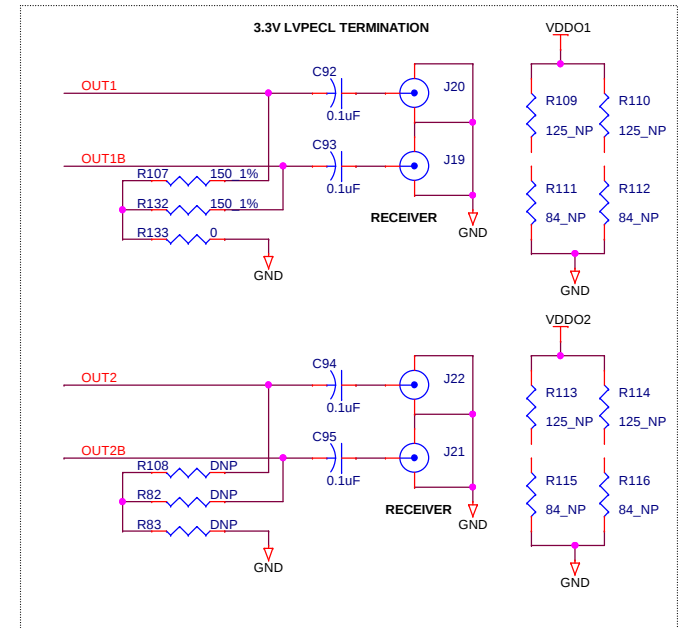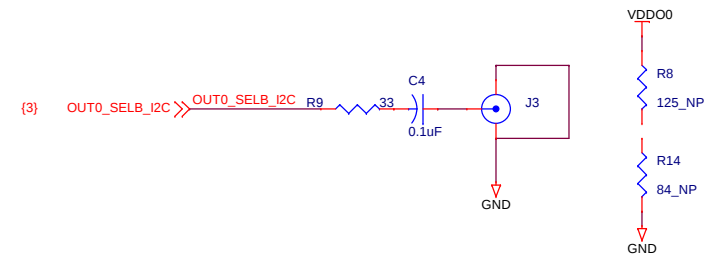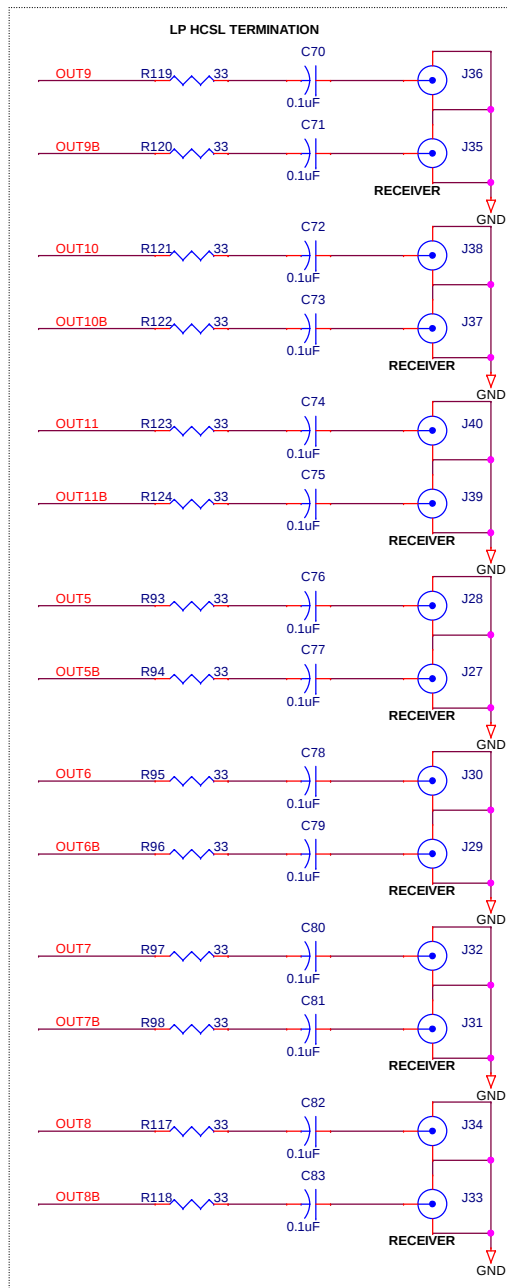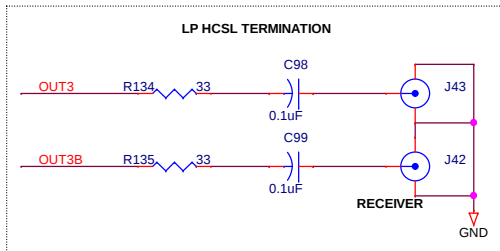




Title		
IDT_5P49V5908 EVM_BOARD_REV1		
Size	Document Number	Rev
B	305-PD-15-0209	1
Date:	Friday, May 22, 2015	Sheet 2 of 5

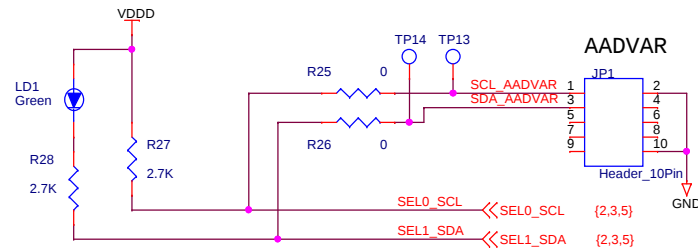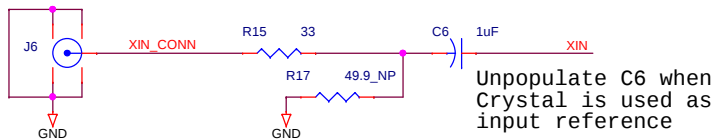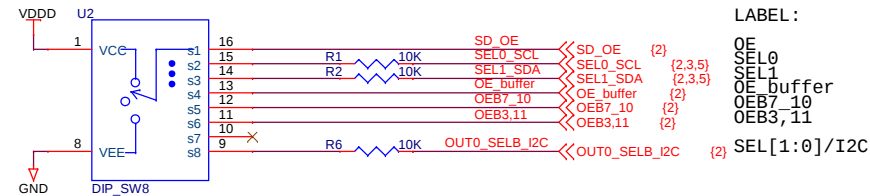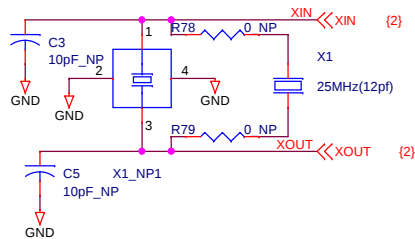


LABEL AS INDICATED FOR 3-PIN HEADERS

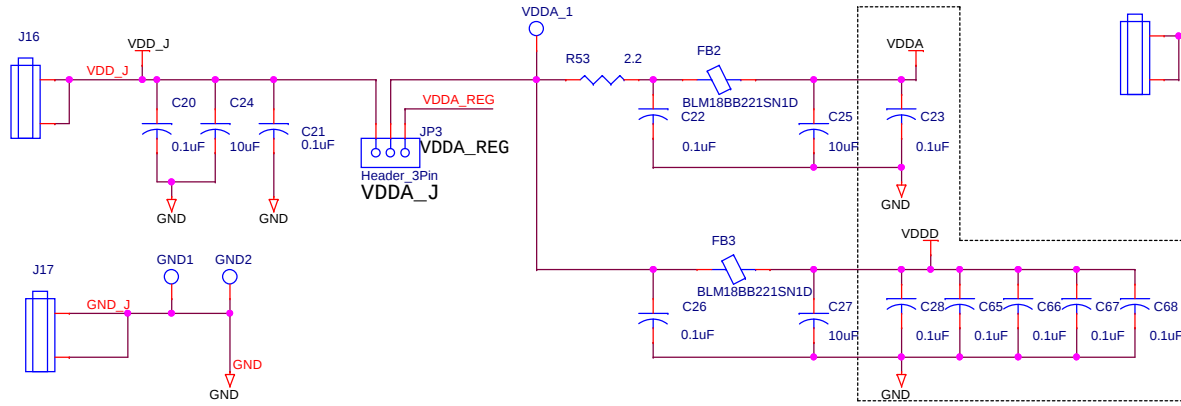

Locate near
DUT power pin

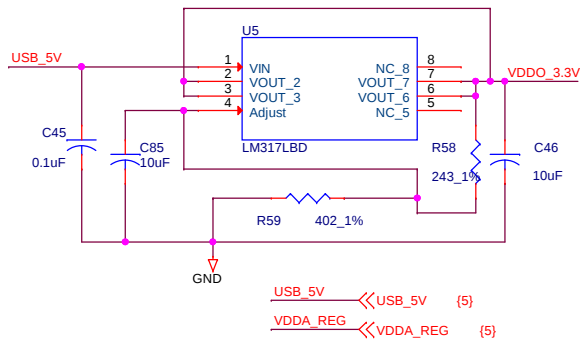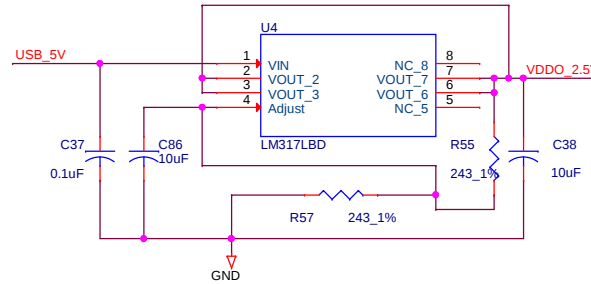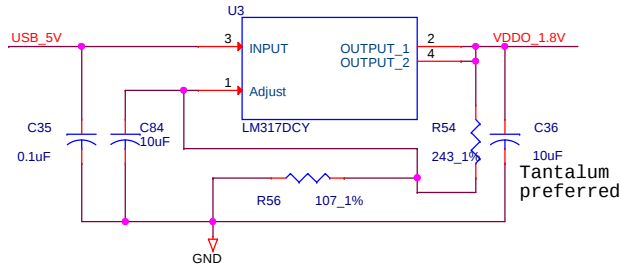


PCB Copper Decal
Recommendations for LM317LD
S0-8

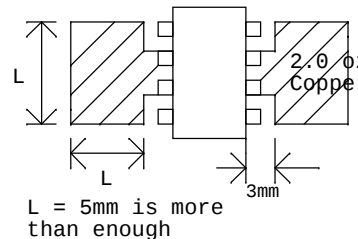

Header Alignment:
Single pin header above
and below the center pin
of 3-pin header so that
center pin can be jumped
with the surrounding 4
pins, shown as left

LABEL ON EACH RESPECTIVE PIN OF
HEADERS: 1.8V, 2.5V, 3.3V

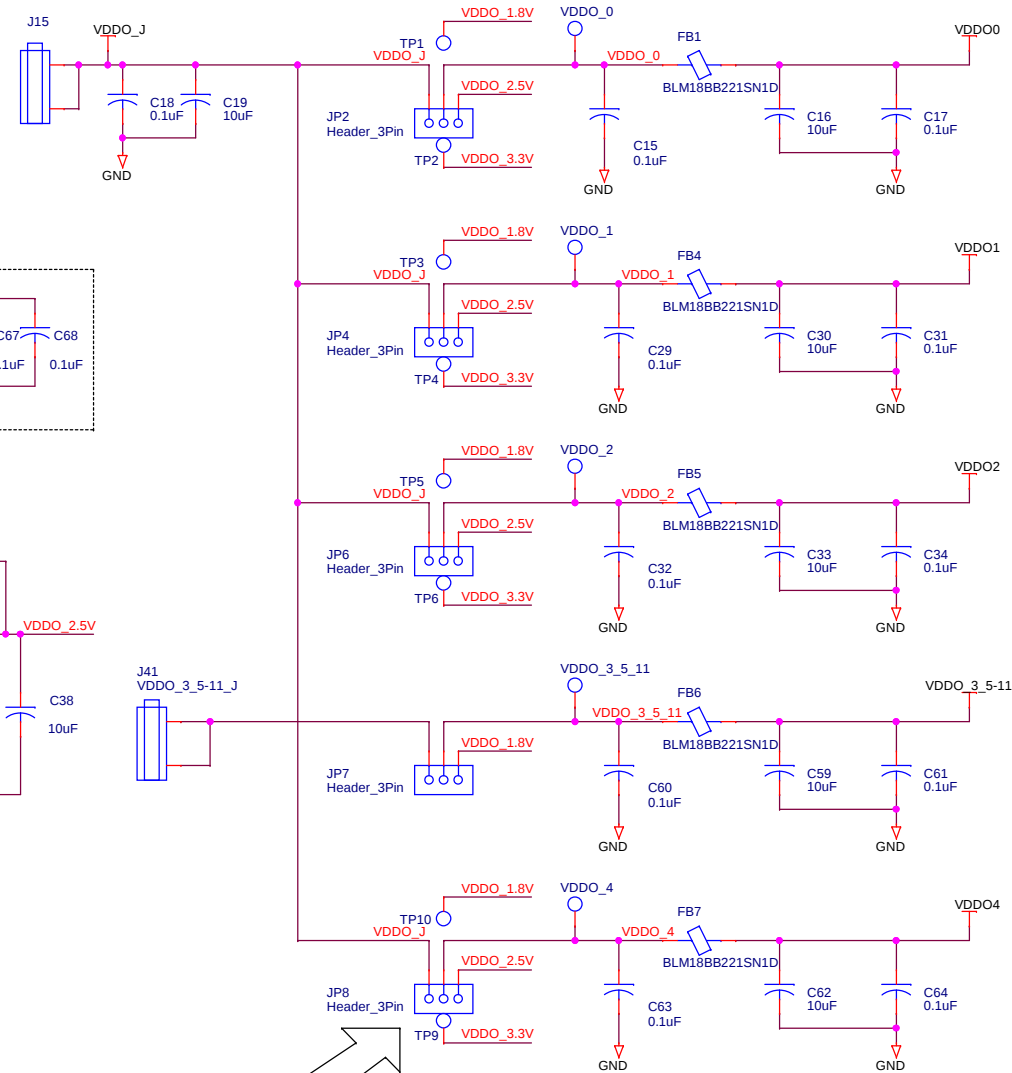

Title		
IDT_5P49V5908 EVM_BOARD_REV1		
Size	Document Number	Rev
B	305-PD-15-0209	1
Date:	Friday, May 22, 2015	Sheet 4 of 5

